

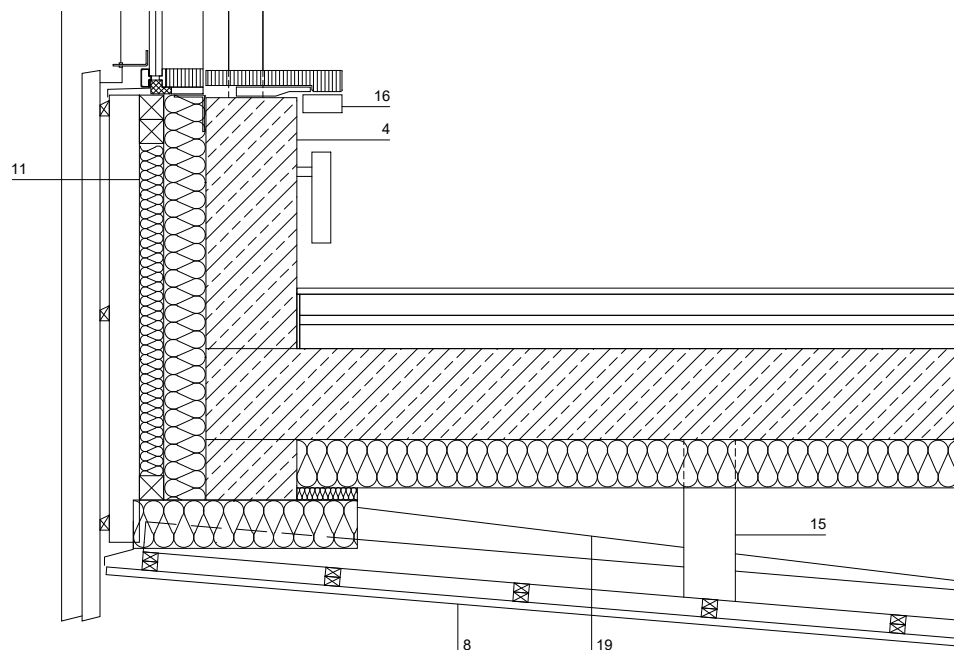


- 1 ROOF CONSTRUCTION:
100MM EXTENSIVE ROOF PLANTING SUBSTRATE
1MM WOVEN FILTER MEDIUM
40MM DRAINAGE
4MM PROTECTION MAT
1,8MM POLYOLEFINE PROOFING
200MM POLYURETHAN INSULATION
220MM SOLID WOOD CEILING SPRUCE CLT
VISUAL QUALITY
- 2 TRANSOM MULLION FACADE
TRIPLE GLAZING
- 3 WALL CONSTRUCTION:
200MM SOLID WOOD WALL CLT
VAPOR BARRIER
200MM MINERAL WOOL
2MM SEALING MEMBRANE BLACK
SUPPORTING STRUCTURE BLACK GLAZED LARCH
40-100MM WOODEN FACADE
OPEN CLADDING WITH DIFFERENT TYPES OF GLAZED
LARCH SLATS
- 4 REINFORCED EXPOSED CONCRETE
- 5 SUNSHADES
LARCH SLATS GLAZED
- 6 WINDOW FRAME
BRUSHED AND CLEAR COATED LARCH
- 7 FALL PROTECTION
EXTENDED LARCH SLATS GLAZED
- 8 COUNTERBATTENS
BLACK GLAZED LARCH
SUPPORTING STRUCTURE
- 9 SUPPORTING STRUCTURE BLACK GLAZED LARCH
- 10 EXTERNAL VENETIAN BLIND
WITH CABLE GUIDANCE
- 11 SEALING MEMBRANE BLACK
- 12 TRANSOM MULLION FACADE
CLEAR COATED LARCH CLT
- 13 WOODEN CEILING
SPRUCE VISUAL QUALITY
- 14 INTERIOR ROLLER BLIND
- 15 SUSPENSION WOOD
- 16 CONTINUOUS CABLE HOUSING
ANODISED ALUMINIUM
- 17 WINDOWSILL
BRUSHED AND CLEAR COATED LARCH CLT
- 18 STEEL PILLAR WITH FIRE PROTECTION COATING
- 19 REINFORCED CONCRETE BEAM WITH MINERAL
INSULATION
- 20 GALVANIZED THREADBAR WITH ANODISED ALUMINIUM
DISTANCE SLEEVE
- 21 SUPPORTING CONSTRUCTION
GALVANIZED STEEL

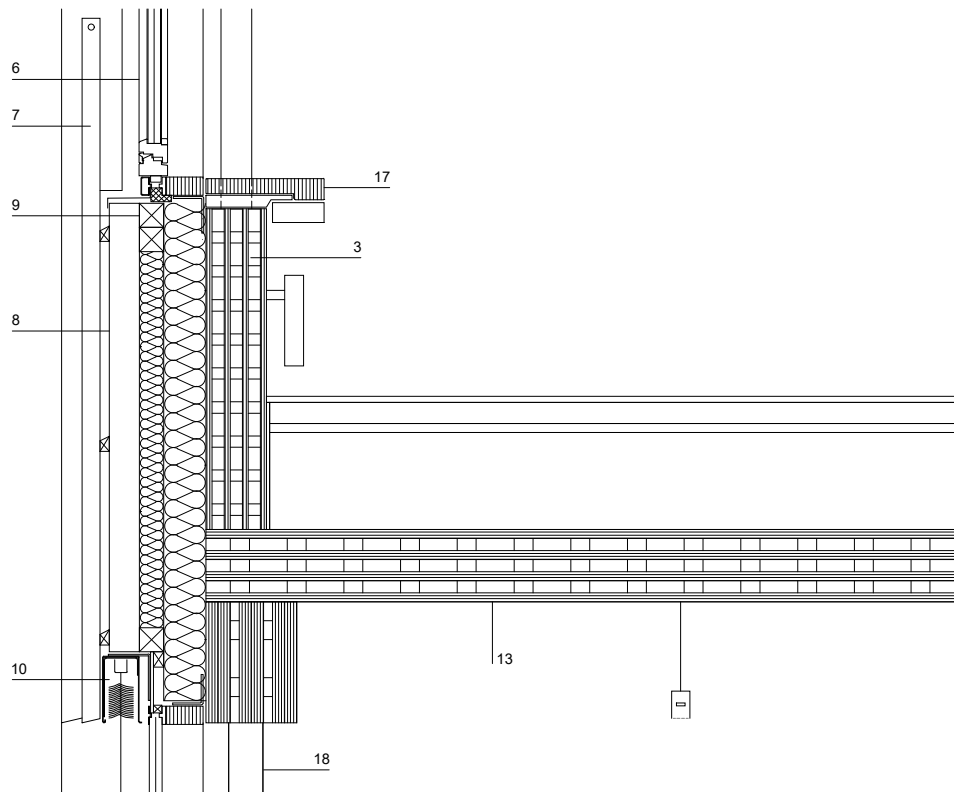

- CROSS LAMINATED TIMBER
- REINFORCED EXPOSED CONCRETE

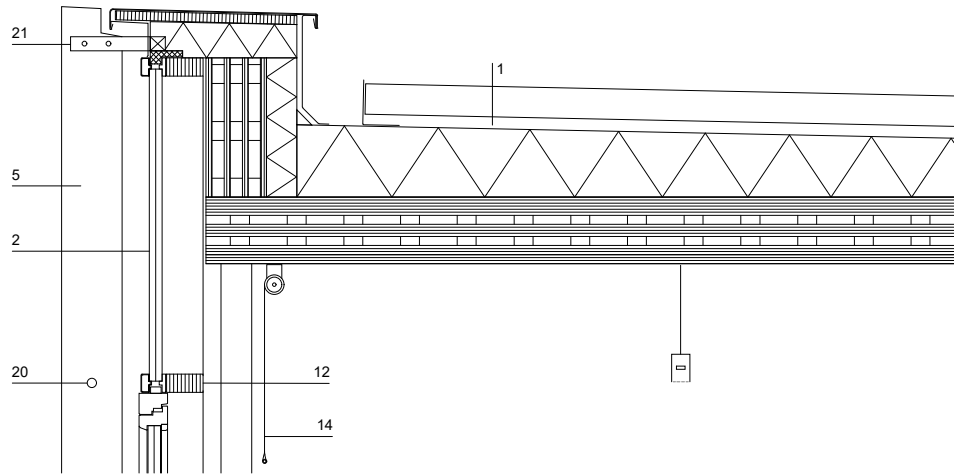