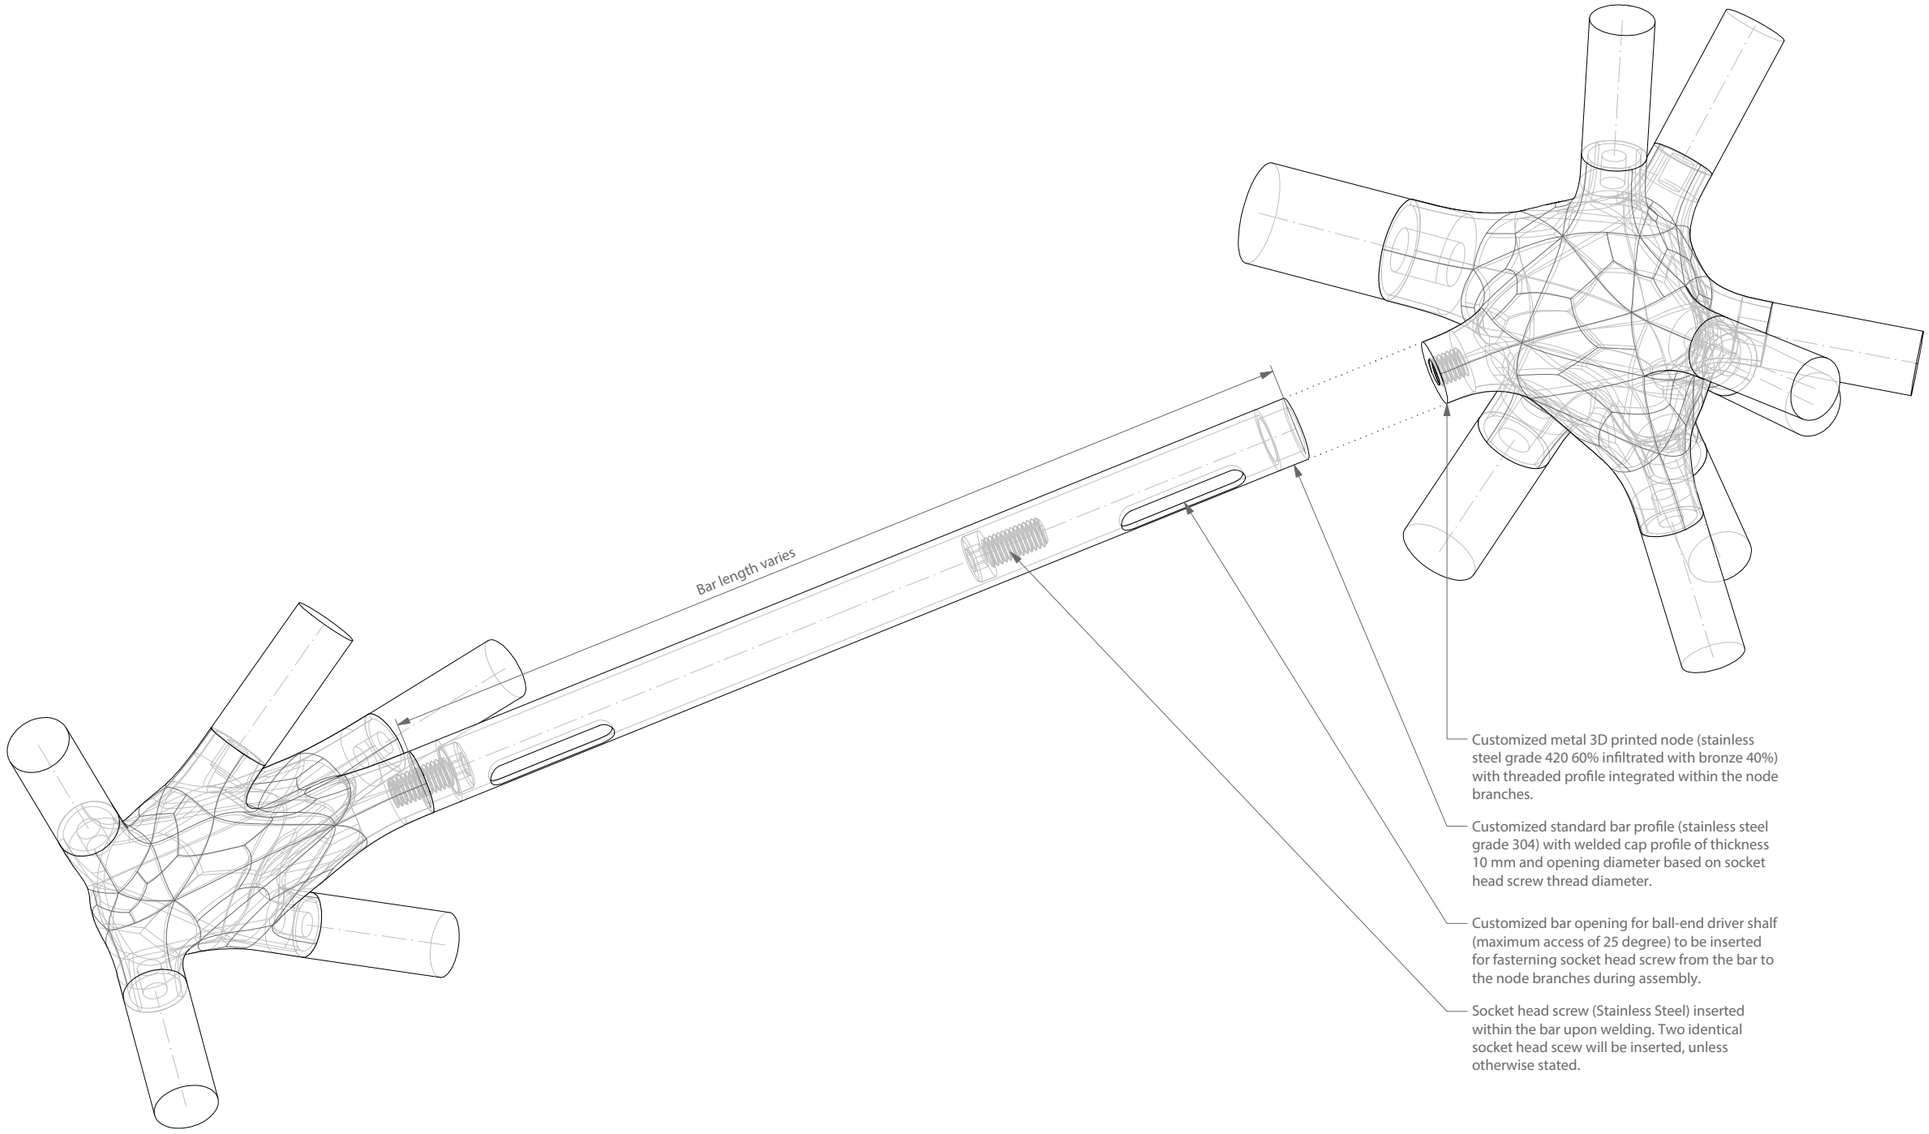
Bar length varies
Customized metal 3D printed node (stainless steel grade 420 60% infiltrated with bronze 40%) with threaded profile integrated within the node branches.
Customized standard bar profile (stainless steel grade 304) with welded cap profile of thickness 10 mm and opening diameter based on socket head screw thread diameter.
Customized bar opening for ball-end driver shalf (maximum access of 25 degree) to be inserted for fasterning socket head screw from the bar to the node branches during assembly.
Socket head screw (Stainless Steel) inserted within the bar upon welding. Two identical socket head scew will be inserted, unless otherwise stated.