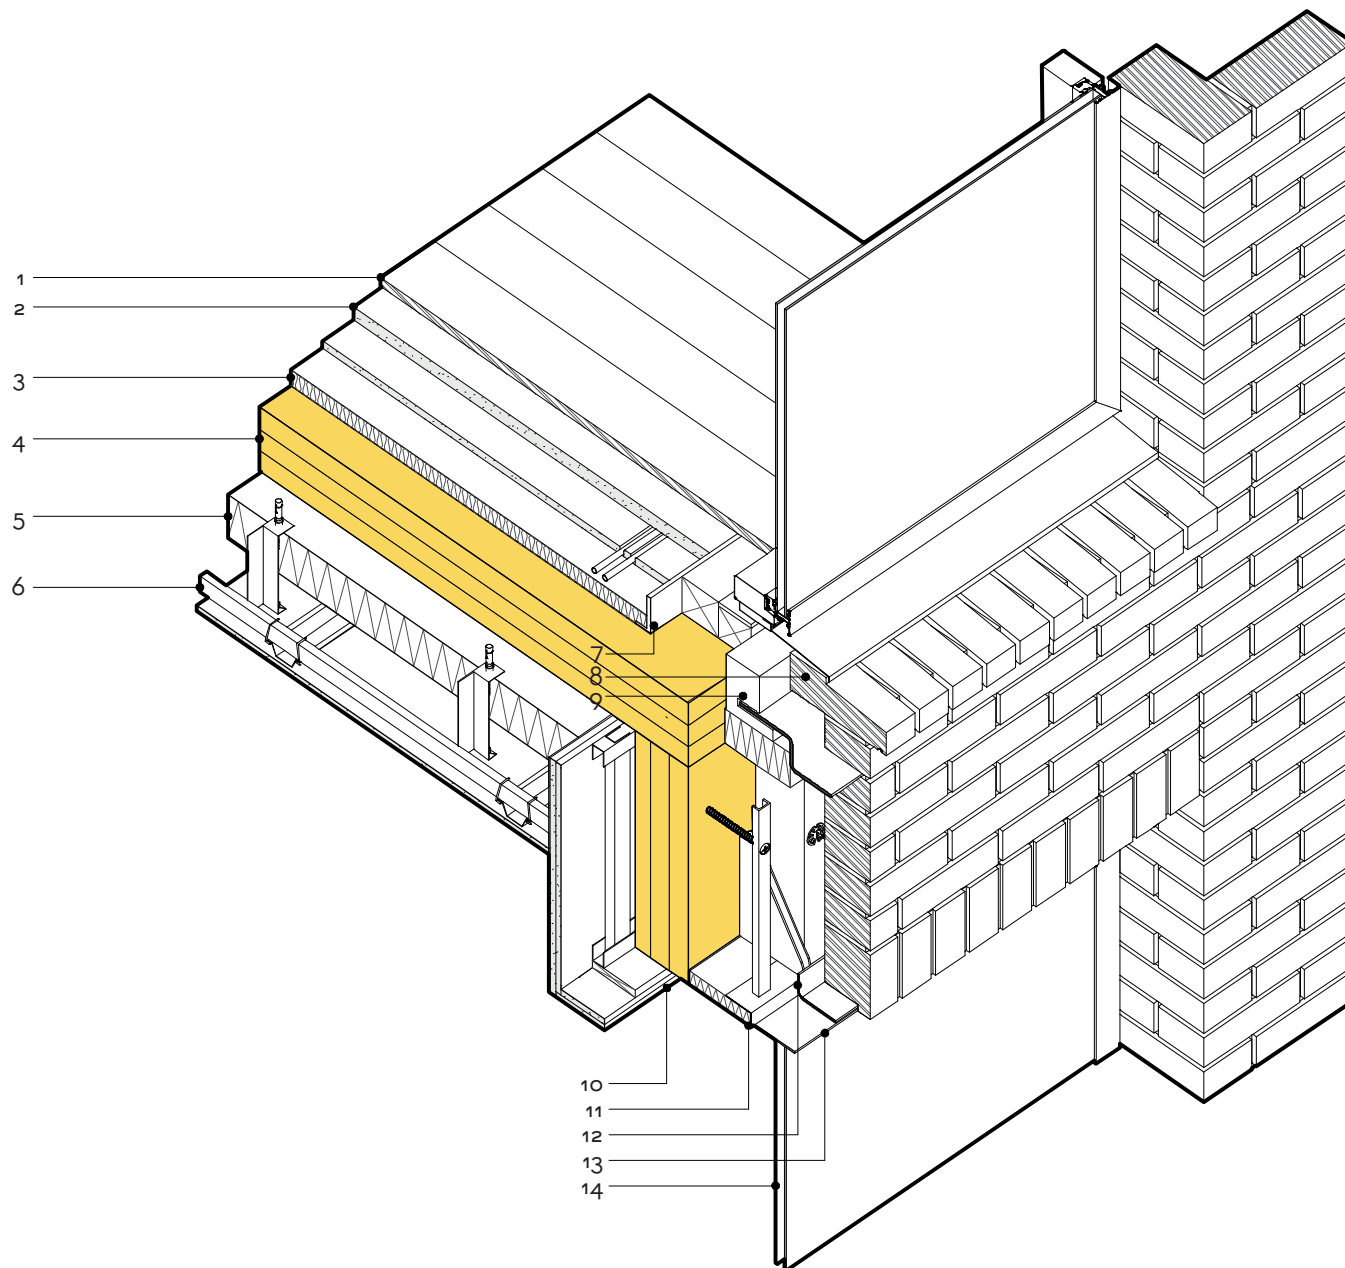


Section Key

1. Engineered timber flooring
2. Screed with integral underfloor heating
3. Impact sound insulation
4. 100mm CLT panel
5. 50mm mineral wool insulation
6. 12.5mm plasterboard suspended ceiling
7. Flanking strip
8. Canted brick cill
9. Cill supporting angle
10. 2 x 12.5mm layers plasterboard
11. Fire rated cavity closer
12. Masonry support angle
13. Pressed PPC aluminium flashing
14. Composite window. Double glazing with timber/aluminum PPC frame